



classic 10-point touch screen ET range



dual OS ETD range with





## **BVS** ECOtouch

ost educational establishments are forever juggling their budgets to ensure their classrooms are equipped with the latest technology at the best possible price. If you are in this position, you have come to the right place. At BVS, our ethos is to bring you the highest quality products without compromising on features but at prices that are very affordable. Using professional grade LED panels, the BVS ECOtouch range has been developed to provide long term durability and performance for a typical learning environment. There is also a choice of screen sizes to suit every type of classroom.


ith all BVS ECOtouch screens, you can choose from a range of market leading software that will facilitate seamless integration and collaboration between students and teachers. The ability to use 10 points of touch is bound to engage and inspire your students. We've even included a useful Freeze Frame function for the teacher so you can work independently on your device while the class is occupied with a given task. The BVS ECOtouch screens are designed to give you outstanding quality. But if you have an issue, our market leading 7 year warranty will give you complete peace of mind.

# Choice of Software





# Year Warranty

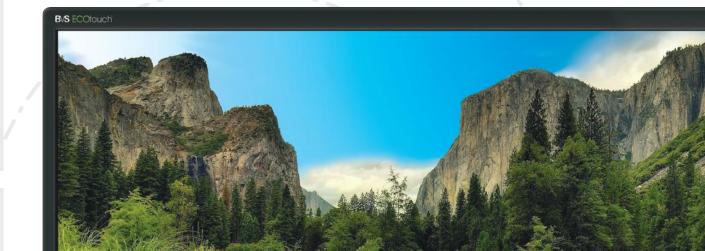

The BVS 65" Screens are absolutely stunning! So much better than the old interactive whiteboards and projectors. Your prices are very keen and affordable. If any school is considering purchasing touch screens, your BVS ECOtouch 65" Screens tick all the boxes!

Penwortham Girls High School

# **BVS** ECOtouch

# the classic range designed for learning and presentation

# ET series



ring your lessons to life with the ET series screens boasting all the features you are likely to want, but at an amazingly low price.

Fascilitating 10 points of touch, anti-glare, freeze frame, full HD 1080P and an industry leading 7 Year warranty, the ET series is designed to put you in control.

Available in 3 popular sizes and 3 popular software options.

### the *classic* range

- 10 point touch
- Anti-glare toughened glass
- Built-in speaker
- Freeze frame
- Full HD 1080p wide screen
- Ultra quiet
- 7 year warranty



#### Hardware

#### 10-Point Infrared Touch Technology

Using the most durable and robust commercial touch technology available. Use anything such as your finger, or one of the styluses included, as your pointer.

#### Narrow Bezel

Connectivity

more permanent

connections such

out, RS-232, VGA,

HDMI, YPbPr, USB.

The rear of the

Stylish and sleek enclosure with rounded corners.



#### LED Backlight

eco-friendly LED backlight focusses on optimum brightness and contrast; causing no eye strain as you would get from projectors. The panel and backlight have a lifespan in excess of 80,000 hours.

#### Easy Access Ports Flexibility

Quickly and conveniently connect your own laptop to the screen using the front facing HDMI and Touch USB ports.

#### **Etched Glass**

Improves tactility for smooth touch gestures. The anti-glare nano coating also diffuses external light so that images and videos are much clearer.

| Product Size W x H x D (mm)         1274.4 x 758.9 x 97.2         1512.4 x 902.4 x 92         1634 x 976 x 92.7           Display Area W x H (mm)         1290.6 x 80.4         1822.34 x 807.34         1563.4 x 875.6           Display Area W x H (mm)         1290.6 x 80.4         1822.34 x 807.34         1563.4 x 875.6           Chouch Technology         16.9         16.9         1879.1           Brightness         5000 cd/m²         178°         178°           Contract Rotto         50000-1         1820 x 1080         1820 x 1080           Viewing Angle         178°         180000         1820 x 1080           Viewing Angle         1820 x 1080         1820 x 1080         1820 x 1080           Video         PAL/SECAM         50000         1820 x 1080   | BVS ECOtouch ET series           | ET551 classic  | ET651 classic       | ET701 classic     |
|---|----------------------------------|--|---------------------|-------------------|
| Display Area W x H (mm)         1299 € x 680.4         143.2.4 x 807.34         1553.4 x 875.6           Touch Technology         Infrired 10 point fouch           Aspect Rollo         16.9           Brightness         500 cd/m2           Contrast Rollo         5000:1           Velving Angle         178*           Resolution         1920 x 1080           Uteline (house)         500000           Video         PAI/SECAM           Speciders         2 x 156V           Minimum Touch         \$5mm           Response Ilime         \$5ms           Positioning Accuracy         \$7ms           Touch Resolution (interpolation)         3276 x 32768           Interface         Uslimited           Touch Compatibility         10 Point Touch – Android, Linux, Windows 7/8/10           Touch Cingentibility         10 Point Touch – Android, Linux, Windows 7/8/10           Touch Linux         Unlimited           Inputs (side)         AV/Audiox 1, S/Video/Audiox 1, VSB (PO) x 1, VOX + I, HDMI x 1           Toutputs         AV/Audiox 1, S/Video/Audiox 1, VSB (PO) x 1, VOX + I, HDMI x 1           Power Supply         ACC110-240V (5014-2014)           Storage Flumidity         \$0.50           Storage Flumidity         \$0.50   | Screen Size                      | 55 inch  | 65 inch             | 70 inch           |
| Touch Technology         Intrinced 10 point fouch           Aspect Retino         16-9           Righthriss         500 cd/m2           Contrast Retilo         500001           Viewing Angle         178°           Resolution         1920 x 1080           Utelline (hours)         500000           Video         PAL/SECAM           Species         2 x 15W           Minimum Touch         2 5mm           Response Time         5 5ms           Postloning Accuracy         2 mm           Touch Resolution (interpolation)         3286 x 32788           Interface         188           Touch Compatibility         10 Point Touch - Android, Linux, Windows 7/8/10           Touch Times         Use (mark) x 1.08 (PC) x 1.9G x 1. HDM1 x 1           Inputs (side)         AV/Audio x 1. SV (deo/Audio x 1. VSB/ (PC) x 1.9D M1 x 1. HDM1 x 1           Inputs (side)         AV/Audio x 1. VSB/ (PC) x 1.9B M1 x 1. HDM1 x 1           Outputs         AV/Audio x 1. SV (deo/Audio x 1. VSB/ (PC) x 1.9D M1 x 1. HDM1 x 1           Inputs (side)         AV/Audio x 1. Cockid Digital Audio x 1. Touch USB (Type B) x 1           Outputs         AV/Audio x 1. SV (deo/Audio x 1. Cockid Digital Audio x 1. Touch USB (Type B) x 1           Power Consumption (sid and by)         \$ 150 x 100  | Product Size W x H x D (mm)      | 1274.4 x 758.9 x 97.2  | 1512.4 x 902.4 x 92 | 1634 x 976 x 92.7 |
| Aspect Ratio         16-9           Binghness         500 cd/m2           Controst Ratio         5000-1           Viewing Angle         178°           Resolution         1920 x 1080           Lifetime (hours)         500000           Video         PAL/SECAM           Speckers         2 x 15W           Minimum Touch         5 fmm           Response Time         5 fms           Positioning Accuracy         5 fms           Positioning Accuracy         2 mm           Touch Compatibility         10 Point Touch - Android, Linux, Windows 7/8/10           Touch Compatibility         10 Point Touch - Android, Linux, Windows 7/8/10           Touch Times         Unlimited           Inputs (steam)         4 X/Audio x 1, SV/Ade/Audio x 1, VGA x 1, HDM x 1           Inputs (steam)         AV/Audio x 1, SV/Ade/Audio x 1, VGA x 1, HDM x 1           Inputs (steam)         AV/Audio x 1, SV/Ade/Audio x 1, VGA x 1, HDM Inteled           Inputs (steam)         AV/Audio x 1, SV/Ade/Audio x 1, Coaxiel Digital Audio x 1           Outputs         AV/Audio x 1, SV/Ade/Audio x 1, Coaxiel Digital Audio x 1           Power Supply         ACTIO-240V (50Hz-50Hz)           Storage Famperature         5 °C           Working Humidity         S a Coaxiel (st   | Display Area W x H (mm)          | 1209.6 x 680.4   | 1432.34 x 807.34    | 1553.4 x 875.6    |
| Brightness         500 cd/m2           Contrast Ratio         5000:1           Viewing Angle         178°           Resolution         1920 x 1080           Lifetime (hours)         500000           Video         PAL/SECAM           Speakers         2 x 15W           Minimum Touch         2 5 mm           Response Time         ≤ 5 ms           Positioning Accuracy         5 5 ms           Positioning Accuracy         3278 x 32768           Interface         USB           Touch Resolution (Interpolation)         3278 x 32768           Interface         USB           Touch Compatibility         10 Point Touch – Android, Linux, Windows 7/8/10           Touch Times         Unlimited           Inputs (right)         4 AV/Audio x 1, VGA/Audio x 1, VGA/Audio x 1, VGA/X 1, HDMIx 1           Inputs (side)         AV/Audio x 1, SV/Ideo/Audio x 1, VGA/Audio x 1, VGA/X 1, HDMIx 1           Inputs (side)         AV/Audio x 1, SV/Ideo/Audio x 1, VGA/Audio x 1, VG   | Touch Technology                 | Infrared 10 point touch  |                     |                   |
| Contrast Ratio         5000:1           Viewing Angle         178°           Resolution         1920 x 1080           Lifetime (hours)         500000           Video         PAL/\$ECAM           Speckers         2 x 15W           Minimum Touch         5 5mm           Response Time         ≤ 5mm           Positioning Accuracy         ± 2mm           Touch Resolution (Interpolation)         32768 x 32768           Interface         USB           Touch Compatibility         109 Point Touch – Android, Linux, Windows 7/8/10           Touch Immes         Uslimited           Inputs (front)         USB (rouch) x 1, USB (rOuch) x 1, USB (rC) x 1, VCA x 1, HDMIx 1           Inputs (side)         AV/Audio x 1, S-Video/Audio x 1, VPbPr/YCbCr, HDMI. Multi-Media USB x 1, Touch USB (Type B) x 1           Outputs         AV/Audio x 1, S-Video/Audio x 1, VPbPr/YCbCr, HDMI. Multi-Media USB x 1, Touch USB (Type B) x 1           Outputs         AV/Audio x 1, Coaxial Digital Audio x 1         Touch USB (Type B) x 1           Power Consumption (standby)         ACC10-240V (S012-60H2)         Touch USB (Type B) x 1           Power Consumption (standby)         S C         Working Humidity         S S           Storage Fumperature         5 °C         Working Humidity         S S         C  | Aspect Ratio                     | 16:9   |                     |                   |
| Viewing Angle         178°           Resolution         1920 x 1080           Lifelime (hours)         500000           Video         AL/SECAM           Speakers         2 x 15W           Minimum Touch         ≤ 5mm           Response Time         ≤ 5ms           Positioning Accuracy         ≤ 5ms           Touch Resolution (Interpolation)         32768 x 32768 x 32768           Interface         USB           Touch Compatibility         10 Point Touch - Android, Linux, Windows 7/8/10           Touch Times         USB (rouch) x 1, USB (rouch) x 1, USB (PC) x 1, VGA x 1, HDMI x 1           Inputs (front)         USB (rouch) x 1, USB (PC) x 1, VGA x 1, HDMI x 1           Inputs (side)         AV/Audio x 1, S-Video/Audio x 1, VPSP/PYCCCC, HDMI, Multi-Media USB x 1, Touch USB (type B) x 1           Outputs         AV/Audio x 1, S-Video/Audio x 1, VPSP/PYCCCC, HDMI, Multi-Media USB x 1, Touch USB (type B) x 1           Power Supply         AC110-240V (50Hz-6Hz)           Power Consumption (standby)         \$ C           Storage Temperature         \$ C           Working Humidity         \$ C           Storage Temperature         \$ C           Working Humidity         \$ C           Storage Temperature         \$ C           Working Humidity<  | Brightness                       | 500 cd/m2  |                     |                   |
| Resolution         1920 x 1080           Lifetime (hours)         50000           Video         PAL/SECAM           Speakers         2 x 15W           Minimum Touch         ≥ 5mm           Response Time         ≤ 5ms           Positioning Accuracy         ± 2mm           Touch Resolution (Interpolation)         32768 x 3278           Interface         USB           Touch Compatibility         10 Point Touch – Android, Linux, Windows 7/8/10           Touch Times         Unlimited           Inputs (side)         AV/Audio x 1, 3-Video/Audio x 1, VSB (PC) x 1, VSB x N LDMI, x UIHMed uSB x 1, Touch USB (Type B) x 1           Outputs         AV/Audio x 1, 3-Video/Audio x 1, VSBA/Audio x 1, YPbP/Y/VSbcr, HDMI, Multi-Med uSB x 1, Touch USB (Type B) x 1           Power Supply         AV/Audio x 1, 3-Video/Audio x 1, VSBA/Audio x 1, YPbP/Y/VSbcr, HDMI, Multi-Med uSB x 1, Touch USB (Type B) x 1           Power Consumption (standby)         AV/Audio x 1, 3-Video/Audio x 1, VSBA/Audio x 1, YPbP/Y/VSbcr, HDMI, Multi-Med uSB x 1, Touch USB (Type B) x 1           Storage Temperature         5.5%           Storage Temperature         5.5%           Storage Temperature         5.5%           Winding Humidity         10%           Storage Temperature         5.5%           VESA Holes W H M DIM         4 230W <td>Contrast Ratio</td> <td colspan="3">5000:1</td>  | Contrast Ratio                   | 5000:1   |                     |                   |
| Lifetime (hours)         50000           Video         PAL/SECAM           Speakers         2 x 15W           Minimum fouch         ≤ 5mm           Response Time         ≤ 5ms           Positioning Accuracy         ± 2 mm           Touch Resolution (interpolation)         32568 x 32768           Touch Compatibility         10 Point Touch – Android, Linux, Windows 7/8/10           Touch Times         Uslimited           Inputs (front)         4 X/Audio x 1, SVI deo/Audio x 1, VSA/Audio x 1, VSA  | Viewing Angle                    | 178°   |                     |                   |
| Video         PAL/SECAM           Speakers         2 x 15W           Minimum Touch         ≥ 5mm           Response Time         ≤ 5ms           Positioning Accuracy         ± 2mm           Touch Resolution (Interpolation)         32768 x 32768           Interface         USB           Touch Compatibility         10 Point Touch – Android, Linux, Windows 7/8/10           Touch Times         Unlimited           Inputs (front)         USB (fouch) x 1, USB (PC) x 1, VGA x 1, HDMI x 1           Inputs (side)         AV/Audio x 1, S-Video/Audio x 1, VBA/PC/bCr, HDMI, Multi-Media USB x 1, Touch USB (Type B) x 1           Outputs         AV/Audio x 1, S-Video/Audio x 1, VBA/PC/bCr, HDMI, Multi-Media USB x 1, Touch USB (Type B) x 1           Outputs         AV/Audio x 1, Coaxial Digital Audio x 1           Power Consumption (standby)         AV/Audio x 1, Coaxial Digital Audio x 1           Power Consumption (standby)         AV/Audio x 1, Coaxial Digital Audio x 1           Storage Temperature         5°C           Working Humidity         10%           Storage Temperature         5°C           Working Humidity         10%           Storage Fumidity         8           Accessories         Remote control, AC power cable, USB cable, HDMI cable           Power Consumption (W) </td <td>Resolution</td> <td colspan="3">1920 x 1080</td>   | Resolution                       | 1920 x 1080  |                     |                   |
| Speakers         2 x 15W           Minimum Touch         ≥ 5mm           Response Time         ≤ 5ms           Positioning Accuracy         ± 2mm           Touch Resolution (Interpolation)         32768 x 3276 | Lifetime (hours)                 | 50000  |                     |                   |
| Minimum Touch         ≥ 5mm           Response Time         ≤ 5ms           Positioning Accuracy         ± 2mm           Touch Resolution (Inferpolation)         32768 x 32768 x 32768           Interface         USB           Touch Compatibility         10 Point Touch – Android, Linux, Windows 7/8/10           Touch Times         Unlimited           Inputs (front)         USB (touch) x 1, USB (PC) x 1, VGA x 1, HDMI x 1           Inputs (side)         AV/Audio x 1, S-Video/Audio x 1, VGA/Audio x 1, YPPP/YCDC, HDMI, Multi-Media USB x 1, Touch USB (Type B) x 1           Outputs         AV/Audio x 1, S-Video/Audio x 1, VGA/Audio x 1, YPPP/YCDC, HDMI, Multi-Media USB x 1, Touch USB (Type B) x 1           Outputs         AV/Audio x 1, Coaxial Digital Audio x 1           Power Supply         ACTIO-240V (50Hz-60Hz)           Power Consumption (standby)         5°C           Working Humidity         5°C           Working Humidity         5°C           Working Humidity         5°C           Fower Consumption (W)         ≤ 120W         ≤ 180W         ≤ 230W           Accessories         Remote control. AC power cable, USB cable, HDMI cable         523W           Power Consumption (W)         ≤ 120W         ≤ 180W         ≤ 230W           VESA Holes W x H (mm)         400 x 400 <t< td=""><td>Video</td><td colspan="3">PAL/SECAM</td></t<>   | Video                            | PAL/SECAM  |                     |                   |
| Response Time         ≤ 5ms           Positioning Accuracy         ± 2mm           Touch Resolution (Interpolation)         32768 x 32768 x 32768           Interface         USB           Touch Compatibility         10 Point Touch - Android, Linux, Windows 7/8/10           Touch Times         Unlimited           Inputs (front)         USB (touch) x 1, USB (PC) x 1, VGA x 1, HDM1 x 1           Inputs (side)         AV/Audio x 1, S-Video/Audio x 1, VGA/Audio x 1, VGA/PDF/YCEOC, HDMI, Multi-Media USB x 1, Touch USB (Type B) x 1           Outputs         AV/Audio x 1, Coaxiel Digital Audio x 1           Power Supply         AC110-240V (50Hz-60Hz)           Power Consumption (standby)         S °C           Working Humidity         5 °C           Power Consumption (W)         ≤ 120W         ≤ 180W         ≤ 230W           VESA Holes W x H (mm)         400 x 400         600 x 400         400 x 500           Power Consumption (W)         5 180 x 120 x 31<  | Speakers                         | 2 x 15W  |                     |                   |
| Positioning Accuracy         ± 2mm           Touch Resolution (Interpolation)         32768 x 32768           Interface         USB           Touch Compatibility         10 Point Touch - Android, Linux, Windows 7/8/10           Touch Times         Unlimited           Inputs (front)         USB (touch) x 1, USB (PC) x 1, VGA x 1, HDMI x 1           Inputs (side)         AV/Audio x 1, S-Video/Audio x 1, VS-A/Audio x 1, VS-PbPr/YCbCr, HDMI, Multi-Media USB x 1, Touch USB (Type B) x 1           Outputs         AV/Audio x 1, S-Video/Audio x 1, S-Video/Audio x 1, Coaxid Digital Audio x 1           Power Supply         AC110-240V (50Hz-60Hz)           Power Consumption (standby)         ≤ 0.5W           Storage Temperature         5 °C           Working Humidity         10%           Storage Humidity         35%           Accessories         Remote control, AC power cable, USB cable, HDMI cable           Power Consumption (W)         ≤ 120W         ≤ 180W         ≤ 230W           VESA Holes W x H (mm)         400 x 400         600 x 400         400 x 500           Package Size W x H x D (mm)         1450 x 951 x 256         1735 x 1165 x 315         1834 x 1220 x 315           Net Weight (kg)         45         67         75   | Minimum Touch                    | ≥ 5mm  |                     |                   |
| Touch Resolution (Interpolation)         32768 x 32768           Interface         USB           Touch Compatibility         10 Point Touch - Android, Linux, Windows 7/8/10           Touch Times         Unlimited           Inputs (front)         USB (touch) x 1, USB (PC) x 1, VGA x 1, HDMI x 1           Inputs (side)         AV/Audio x 1, PPbPr/YCBC, HDMI, Multi-Media USB x 1, Touch USB (Type B) x 1           Outputs         AV/Audio x 1, Coaxial Digital Audio x 1           Power Supply         AC110-240V (50Hz-40Hz)           Power Consumption (standby)         S°C           Working Humidity         10%           Storage Temperature         5°C           Working Humidity         10%           Storage Humidity         35%           Accessories         Remote control, AC power cable, USB cable, HDMI cable           Power Consumption (W)         ≤ 120W         ≤ 180W         ≤ 230W           VESA Holes W x H (mm)         400 x 400         400 x 500           Package Size W x H x D (mm)         1450 x 951 x 256         1735 x 1165 x 315         1834 x 1220 x 315           Net Weight (kg) <th< td=""><td>Response Time</td><td colspan="3">≤ 5ms</td></th<>   | Response Time                    | ≤ 5ms  |                     |                   |
| Interface         USB           Touch Compatibility         10 Point Touch - Android, Linux, Windows 7/8/10           Touch Times         Unlimited           Inputs (front)         USB (touch) x 1, USB (PC) x 1, VGA x 1, HDMI x 1           Inputs (side)         AV/Audio x 1, S-Video/Audio x 1, VGA/Audio x 1, YPbPr/VCbCr, HDMI, Multi-Media USB x 1, Touch USB (Type B) x 1           Outputs         AV/Audio x 1, Cooxial Digital Audio x 1           Power Supply         AC110-240V (50Hz-60Hz)           Power Consumption (standby)         S C           Working Humidity         10%           Storage Temperature         5°C           Working Humidity         10%           Storage Humidity         35%           Accessories         Remote control, AC power cable, USB cable, HDMI cable           Power Consumption (W)         ≤ 120W         ≤ 180W         ≤ 230W           VESA Holes W x H (mm)         400 x 400         600 x 400         400 x 500           Package Size W x H x D (mm)         1450 x 951 x 256         1735 x 1165 x 315         1834 x 1220 x 315           Net Weight (kg)         45 <td>Positioning Accuracy</td> <td colspan="3">± 2mm</td>   | Positioning Accuracy             | ± 2mm  |                     |                   |
| Touch Compatibility         10 Point Touch - Android, Linux, Windows 7/8/10           Touch Times         Unlimited           Inputs (front)         USB (fouch) x 1, USB (PC) x 1, VGA x 1, HDMI x 1           Inputs (side)         AV/Audio x 1, S-Video/Audio x 1, VGA/Audio x 1, VPbPr/YCbCr, HDMI, Multi-Media USB x 1, Touch USB (Type B) x 1           Outputs         AV/Audio x 1, Coaxial Digital Audio x 1           Power Supply         AC110-240V (50Hz-60Hz)           Power Consumption (standby)         ≤ 0.5W           Storage Temperature         5°C           Working Humidity         10%           Storage Humidity         35%           Accessories         Remote control, AC power cable, USB cable, HDMI cable           Power Consumption (W)         ≤ 120W         ≤ 180W         ≤ 230W           VESA Holes W x H (mm)         400 x 400         600 x 400         400 x 500           Package Size W x H x D (mm)         1450 x 951 x 256         1735 x 1165 x 315         1834 x 1220 x 315           Net Weight (kg)         45         67         75  | Touch Resolution (Interpolation) | 32768 x 32768  |                     |                   |
| Touch Times         Unlimited           Inputs (front)         USB (fouch) x 1, USB (PC) x 1, VGA x 1, HDMI x 1           Inputs (side)         AV/Audio x 1, YPbPr/YCbCr, HDMI, Multi-Media USB x 1, Touch USB (Type B) x 1           Outputs         AV/Audio x 1, Coaxial Digital Audio x 1           Power Supply         AC110-240V (50Hz-60Hz)           Power Consumption (standby)         AC110-240V (50Hz-60Hz)           Storage Temperature         5°C           Working Humidity         10%           Storage Humidity         35%           Accessories         Remote control, AC power cable, USB cable, HDMI cable           Power Consumption (W)         ≤ 120W         ≤ 180W         ≤ 230W           VESA Holes W x H (mm)         400 x 400         600 x 400         400 x 500           Package Size W x H x D (mm)         1450 x 951 x 256         1735 x 1165 x 315         1834 x 1220 x 315           Net Weight (kg)         45  | Interface                        | USB  |                     |                   |
| Inputs (front)         USB (touch) x 1, USB (PC) x 1, VGA x 1, HDMI x 1           Inputs (side)         AV/Audio x 1, VGA/Audio x 1, VGA/Audio x 1, VGA/Audio x 1, Coaxial Digital Audio x 1           Outputs         AV/Audio x 1, Coaxial Digital Audio x 1           Power Supply         AC110-240V (50Hz-60Hz)           Power Consumption (standby)         AC110-240V (50Hz-60Hz)           Storage Temperature         5°C           Working Humidity         10%           Storage Humidity         35%           Accessories         Remote control, AC power cable, USB cable, HDMI cable           Power Consumption (W)         ≤ 120W         ≤ 180W         ≤ 230W           VESA Holes W x H (mm)         400 x 400         600 x 400         400 x 500           Package Size W x H x D (mm)         1450 x 951 x 256         1735 x 1165 x 315         1834 x 1220 x 315           Net Weight (kg)         45  | Touch Compatibility              | 10 Point Touch – Android, Linux, Windows 7/8/10  |                     |                   |
| Inputs (side)         AV/Audio x 1, S-Video/Audio x 1, VGA/Audio x 1, YPbPr/YCbCr, HDMI, Multi+Media USB x 1, Touch USB (Type B) x 1           Outputs         AV/Audio x 1, Coaxial Digital Audio x 1           Power Supply         AC110-240V (50Hz-60Hz)           Power Consumption (standby)         ≤ 0.5W           Storage Temperature         5°C           Working Humidity         10%           Storage Humidity         35%           Accessories         Remote control, AC power cable, USB cable, HDMI cable           Power Consumption (W)         ≤ 120W         ≤ 180W         ≤ 230W           VESA Holes W x H (mm)         400 x 400         600 x 400         400 x 500           Package Size W x H x D (mm)         1450 x 951 x 256         1735 x 1165 x 315         1834 x 1220 x 315           Net Weight (kg)         45         67         75  | Touch Times                      | Unlimited  |                     |                   |
| Outputs         AV/Audio x 1, Coaxial Digital Audio x 1           Power Supply         AC110-240V (50Hz-60Hz)           Power Consumption (standby)         ≤ 0.5W           Storage Temperature         5°C           Working Humidity         10%           Storage Humidity         35%           Accessories         Remote control, AC power cable, USB cable, HDMI cable           Power Consumption (W)         ≤ 120W         ≤ 180W         ≤ 230W           VESA Holes W x H (mm)         400 x 400         600 x 400         400 x 500           Package Size W x H x D (mm)         1450 x 951 x 256         1735 x 1165 x 315         1834 x 1220 x 315           Net Weight (kg)         45         67         75   | Inputs (front)                   | USB (touch) $\times$ 1, USB (PC) $\times$ 1, VGA $\times$ 1, HDMI $\times$ 1                                   |                     |                   |
| Power Supply         AC110-240V (50Hz-60Hz)           Power Consumption (standby)         ≤ 0.5W           Storage Temperature         5°C           Working Humidity         10%           Storage Humidity         35%           Accessories         Remote control, AC power cable, USB cable, HDML cable           Power Consumption (W)         ≤ 120W         ≤ 180W         ≤ 230W           VESA Holes W x H (mm)         400 x 400         600 x 400         400 x 500           Package Size W x H x D (mm)         1450 x 951 x 256         1735 x 1165 x 315         1834 x 1220 x 315           Net Weight (kg)         45         67         75   | Inputs (side)                    | AV/Audio x 1, S-Video/Audio x 1, VGA/Audio x 1, YPbPr/YCbCr, HDMI, Multi-Media USB x 1, Touch USB (Type B) x 1 |                     |                   |
| Power Consumption (standby)         ≤ 0.5W           Storage Temperature         5°C           Working Humidity         10%           Storage Humidity         35%           Accessories         Remote control, AC power cable, USB cable, HDMI cable           Power Consumption (W)         ≤ 120W         ≤ 180W         ≤ 230W           VESA Holes W x H (mm)         400 x 400         600 x 400         400 x 500           Package Size W x H x D (mm)         1450 x 951 x 256         1735 x 1165 x 315         1834 x 1220 x 315           Net Weight (kg)         45         67         75   | Outputs                          | AV/Audio x 1, Coaxial Digital Audio x 1  |                     |                   |
| Storage Temperature       5°C         Working Humidity       10%         Storage Humidity       35%         Accessories       Remote control, AC power cable, USB cable, HDMI cable         Power Consumption (W)       ≤ 120W       ≤ 180W       ≤ 230W         VESA Holes W x H (mm)       400 x 400       600 x 400       400 x 500         Package Size W x H x D (mm)       1450 x 951 x 256       1735 x 1165 x 315       1834 x 1220 x 315         Net Weight (kg)       45       67       75  | Power Supply                     | AC110-240V (50Hz-60Hz)   |                     |                   |
| Working Humidity $10\%$ Storage Humidity $35\%$ Accessories $ \begin{array}{ccccccccccccccccccccccccccccccccccc$  | Power Consumption (standby)      | ≤ 0.5W   |                     |                   |
| Storage Humidity         35%           Accessories         Remote control, AC power cable, USB cable, HDMI cable           Power Consumption (W)         ≤ 120W         ≤ 180W         ≤ 230W           VESA Holes W x H (mm)         400 x 400         600 x 400         400 x 500           Package Size W x H x D (mm)         1450 x 951 x 256         1735 x 1165 x 315         1834 x 1220 x 315           Net Weight (kg)         45         67         75   | Storage Temperature              | 5°C  |                     |                   |
| Accessories         Remote control, AC power cable, USB cable, HDMI cable           Power Consumption (W)         ≤ 120W         ≤ 180W         ≤ 230W           VESA Holes W x H (mm)         400 x 400         600 x 400         400 x 500           Package Size W x H x D (mm)         1450 x 951 x 256         1735 x 1165 x 315         1834 x 1220 x 315           Net Weight (kg)         45         67         75  | Working Humidity                 | 10%  |                     |                   |
| Power Consumption (W)         ≤ 120W         ≤ 180W         ≤ 230W           VESA Holes W x H (mm)         400 x 400         600 x 400         400 x 500           Package Size W x H x D (mm)         1450 x 951 x 256         1735 x 1165 x 315         1834 x 1220 x 315           Net Weight (kg)         45         67         75  | Storage Humidity                 | 35%  |                     |                   |
| VESA Holes W x H (mm)       400 x 400       600 x 400       400 x 500         Package Size W x H x D (mm)       1450 x 951 x 256       1735 x 1165 x 315       1834 x 1220 x 315         Net Weight (kg)       45       67       75   | Accessories                      | Remote control, AC power cable, USB cable, HDMI cable  |                     |                   |
| Package Size W x H x D (mm)       1450 x 951 x 256       1735 x 1165 x 315       1834 x 1220 x 315         Net Weight (kg)       45       67       75   | Power Consumption (W)            | ≤ 120W   | ≤ 180W              | ≤ 230W            |
| Net Weight (kg) 45 67 75  | VESA Holes W x H (mm)            | 400 x 400  | 600 x 400           | 400 x 500         |
|   | Package Size W x H x D (mm)      | 1450 x 951 x 256   | 1735 x 1165 x 315   | 1834 x 1220 x 315 |
| Gross Weight (kg) 55 77 85  | Net Weight (kg)                  | 45   | 67                  | 75                |
|   | Gross Weight (kg)                | 55   | 77                  | 85                |

TM

We are really impressed with the robustness and build quality of the screen, the picture clarity is outstanding on such a large screen and the touch sensitivity is pin point perfect. We have been really pleased with the service received and the quality of the product. We would have no hesitation in recommending the BVS ECOtouch screens. Thank you and best wishes.

Mark Kelland, Commercial Manager, Dragon2000 Ltd

TM

From my initial contact to the subsequent order, delivery and installation of our first Touchscreen, we have been delighted with the service, product knowledge and cost of the equipment.

The skilled engineers who installed the touchscreens were extremely polite, worked quickly and efficiently. We have since gone onto to have seven more BVS ECOtouch touchscreens installed and each time, have been extremely delighted with the product.

Judith Buckley, Holymead Pimary School

## www.bvstouchscreens.com